


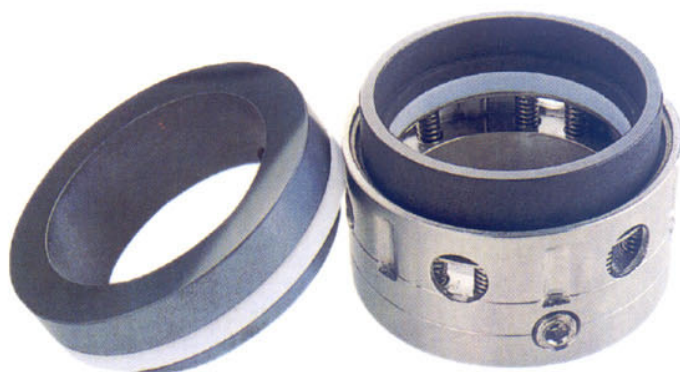


LÍMITES OPERATIVOS

Presión: 10 Bar

Velocidad: 20 m/s

Temperatura: -40 °C ~ 200 °C

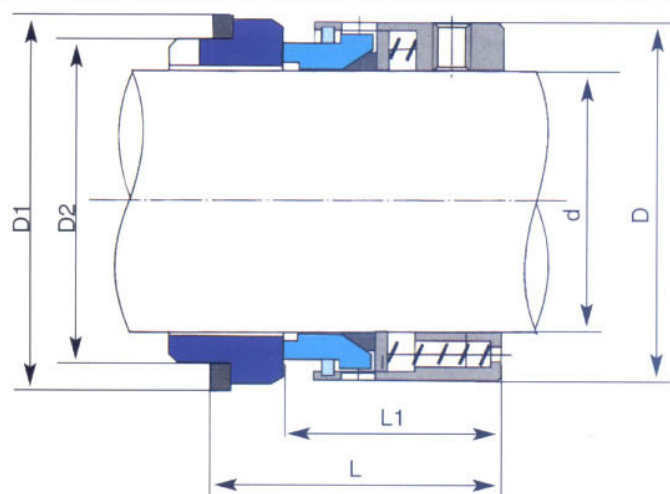

TC 5027

- No equilibrado, sentido independiente.
- Grafito/Cerámica, CS/CS
- Multimuelle
- Disponible EPT, Viton y PTFE

Diámetro d	D	D1	D2	L	L1
14	24.3	25	21	35	23
16	26.3	27	23	35	23
18	32.3	33	27	37.5	24
20	34.3	35	29	37.5	24
22	36.3	37	31	37.5	24
24	38.3	39	33	40	26.7
25	39.3	40	34	40	27
28	42.3	43	37	42.5	30
30	44.3	45	39	42.5	30.5
32	46.3	48	42	42.5	30.5
33	47.3	48	42	42.5	30.5
35	49.3	50	44	42.5	30.5
38	54.3	56	49	45	32
40	56.3	58	51	45	32
43	59.3	61	54	45	32
45	61.3	63	56	45	32

Diámetro d	D	D1	D2	L	L1
48	64.3	66	59	45	32
50	66.3	70	62	47.5	34
53	69.3	73	65	47.5	34
55	71.3	75	67	47.5	34
58	78.3	78	70	52.5	39
60	80.3	80	72	52.5	39
63	83.3	83	75	52.5	39
65	85.3	85	77	52.5	39
68	88.3	90	81	52.5	39
70	90.3	92	83	60	45.5
75	95.3	97	88	60	45.5
80	104.3	105	95	60	45
85	109.3	110	100	60	45
90	114.3	115	105	65	50
95	119.3	120	110	65	50
100	124.3	125	115	65	50