




**LÍMITES OPERATIVOS**


Presión: 7 Bar

Velocidad: 15 m/s

Temperatura: 150 °C

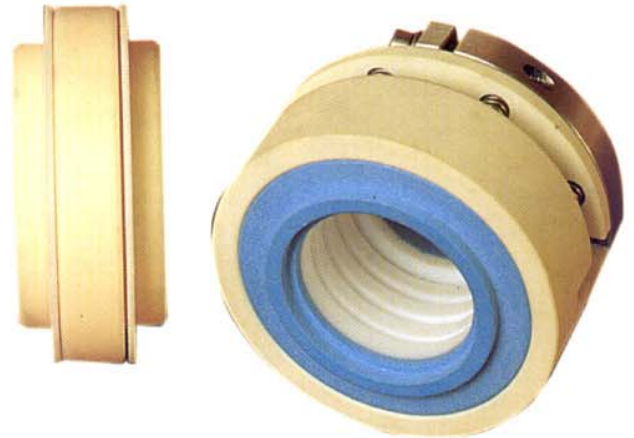

- Semiequilibrado, sentido independiente.
- Disponible en PTFE, fibra de vidrio/cerámica, CS/CS.
- Cierre exterior.

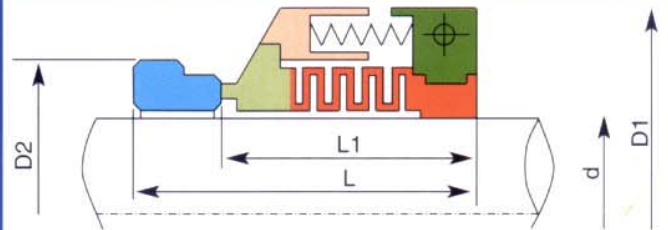

# TC 50AC

Diámetro d	D1	D2	L	L1
25	65	48	53	41
30	67	53	53	41
35	73	58	54	42
40	78	63	54	42
45	89	68	62.5	48
50	94	73	62.5	48
55	96	78	62.5	48
60	101	87	66.5	52.5
65	106	92	66.5	52.5