




LÍMITES OPERATIVOS

Presión: 40 Bar

Velocidad: 15 m/s

Temperatura: -30 °C ~ 200 °C

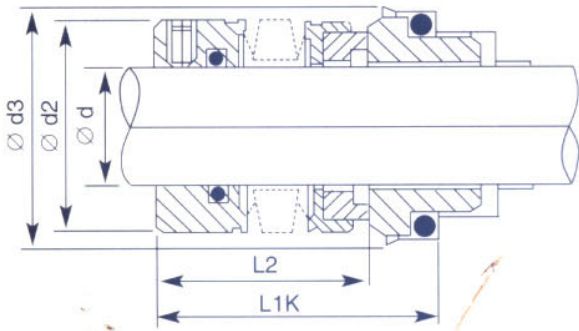

# TC 5550

- Equilibrado, sentido independiente fuele en hastelloy C.
- Grafito/cerámica, CS/CS.
- Disponible en EPT, FEP, kalrez® y viton.

Diámetro d	d2	d3	l1k	l2	Long. Perif.
18	37	33.1	37.5	27.5	116
20	37	35.1	37.5	27.5	117
22	37	37.1	37.5	27.5	118
24	37	39.1	40	30	119
25	37	40.1	40	30	120
28	42.8	43.1	42.5	32.5	122
30	43	45.1	42.5	32.5	123
32	43	48.1	42.5	32.5	124
33	49.2	48.1	42.5	32.5	125
35	49.2	50.1	42.5	32.5	126
38	49.4	56.1	45	34	128
40	55.5	58.1	45	34	129
43	58.7	61.1	45	34	131
45	58.7	63.1	45	34	132
48	61.9	66.1	45	34	134

Diámetro d	d2	d3	l1k	l2	Long. Perif.
50	65.1	70.1	47.5	34.5	136
53	68.2	73.1	47.5	34.5	137
55	71.4	75.1	47.5	34.5	139
58	74.6	78.1	52.5	39.5	141
60	74.6	80.1	52.5	39.5	142
63	80.9	83.1	52.5	39.5	144
65	84.1	85.1	52.5	39.5	145
68	87.3	88.1	52.5	37.5	147
70	87.3	92.1	60	45	148
75	95.2	97.1	60	45	151
80	98.4	105.1	60	44.5	235
85	104.8	110.1	60	44.5	237
90	108	115.1	65	49.5	239
95	114.3	120.1	65	49.5	240
100	120.7	125.1	65	48.5	242