




LÍMITES OPERATIVOS

Presión: 25 Bar

Velocidad: 20 m/s

Temperatura: -40 °C ~ 200 °C

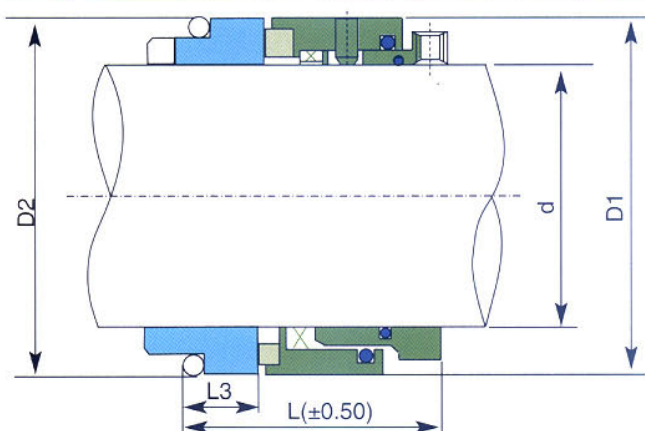

TC 8800

- Equilibrado, sentido independiente.
- Grafito/cerámica, CS/CS. Widia/Widia.
- Juntas EPT, Fep, Kalrez®, Viton.

Diámetro d	D1	D2	L	L3
18	32	33	37.5	9
20	34	35	37.5	9
22	36	37	37.5	9
24	38	39	40	9.5
25	39	40	40	9.5
28	42	43	42.5	10.5
30	44	45	42.5	10.5
32	46	48	42.5	10.5
33	47	48	42.5	10.5
35	49	50	42.5	10.5
38	54	56	45	11.5
40	56	58	45	11.5
43	59	61	45	11.5
45	61	63	45	11.5
48	64	66	45	11.5

Diámetro d	D1	D2	L	L3
50	66	70	47.5	13
53	69	73	47.5	13
55	71	75	47.5	13
58	78	78	52.5	13.5
60	80	80	52.5	13.5
63	83	83	52.5	13.5
65	85	85	52.5	13.5
68	88	90	52.5	13.5
70	90	92	60	15
75	99	97	60	15
80	104	105	60	15
85	109	110	60	16
90	114	115	65	16
95	119	120	65	16
100	124	125	65	16