




LÍMITES OPERATIVOS

Presión: 6 Bar

Velocidad: 10 m/s

Temperatura: -20 °C ~ 180 °C

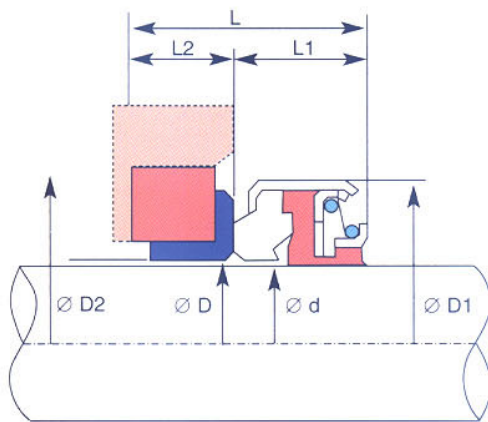

TC AR

- No equilibrado, sentido independiente.
- Grafito/cerámica, CS/CS, Widia/Widia
- Muelle simple.
- Juntas Nitrilo, EPDM, Viton.

Diámetro	d	D1	L1	D	D2	L2	L
6	6	18	8.5	7	22	4	14
7	7	18	11	8	26	5.5	15.5
8	8	24	11	11	26	8	19
10S	10	24	11	13	26	5.5	16.5
10	10	24	11	13	26	8	19
11	11	24	11	13	26	8	19
12	12	24	13	13	26	8	21
12B	12	32	13	14	35	8	21
13	13	24	13	14	26	8	21
14	14	32	13	17	35	8	21
14B	14	35	13	17	38	8	21
15S	15	32	12	17	29.5	8	21
15	15	35	13	17	38	8	21
16S	16	32	13	17	42	8	21
16D	16	39	13	21	38	8	21
16	16	32	13	17	38	8	21
16C	16	35	13	17	38	8	21
16B	16	39	13	21	42	8	21
17	17	39	13	21	42	8	21
18	18	39	13	21	42	8	21
19	19	39	13	21	42	8	21

Diámetro	d	D1	L1	D	D2	L2	L
20D	20	39	13	21	45	10	23
20S	20	39	13	23	45	10	23
20	20	39	13	21	42	8	21
20B	20	42	13	26	45	10	23
22	22	42	13	26	45	10	23
23	23	47	14	27	50	10	24
24	24	47	14	27	50	10	24
25A	25	42	14	27	50	10	24
25	25	47	14	27	50	10	24
28	28	54	15	33	57	10	25
30	30	54	15	33	57	10	25
32	32	54	15	33	57	10	25
35	35	60	16	38	63	10	26
38	38	65	18	42	68	12	30
40	40	65	18	42	68	12	30
45	45	70	20	47	73	12	32
50	50	85	23	52	88	15	38
55	55	85	23	56	88	15	38
60	60	105	30	67	110	15	45
65	65	105	30	67	110	15	45
70	70	105	32	72	110	15	47