




LÍMITES OPERATIVOS

Presión: 10 Bar


Velocidad: 20 m/s

Temperatura: -40 °C ~ 180 °C

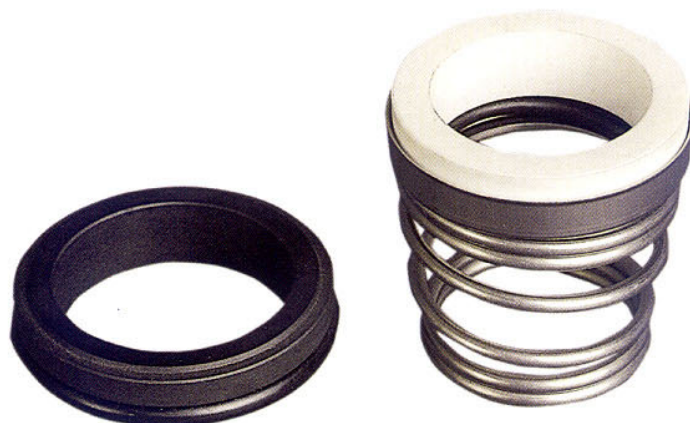

# TC FN - DIN

- No equilibrado, sentido dependiente.
- Cerámica/grafito, CS/CS, W/W.
- Disponible EPT, Viton.
- Muelle simple.

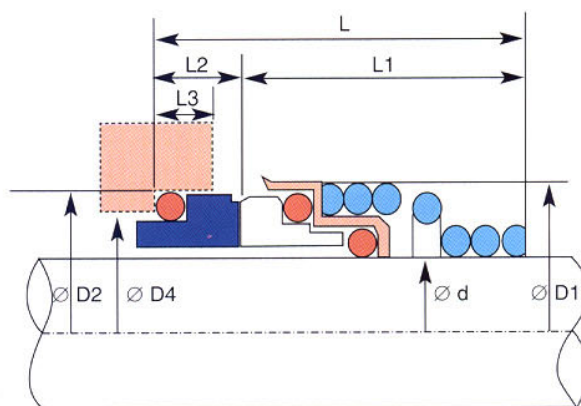

Diámetro d	D1	D2	D4	L	L1	L2	L3
10	20	21	17	22	15	7	5.50
12	22	23	19	25	18	7	5.50
14	24	25	21	29	22	7	5.50
16	26	27	23	30	23	7	5.50
18	32	33	27	34	24	10	7
20	33	35	29	35	25	10	7
22	36	37	31	35	25	10	7
24	37	39	33	37	27	10	7
25	38	40	34	37	27	10	7
28	42	43	37	39	29	10	7
30	44	45	39	40	30	10	7
32	45.50	48	42	40	30	10	7
33	46.50	48	42	49	39	10	7
35	49	50	44	49	39	10	7
38	56	56	49	55	42	13	8
40	58	58	51	55	42	13	8