


LÍMITES OPERATIVOS

Presión: 10 Bar

Velocidad: 20 m/s

Temperatura: -40 °C ~ 180 °C

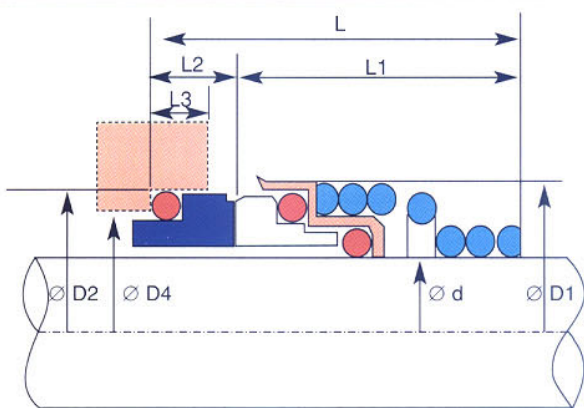

TC FN

- No equilibrado, sentido dependiente.
- Cerámica/grafito, CS/CS, W/W.
- Muelle simple.
- Juntas EPT/Viton.

Diámetro d	D1	D2	D4	L	L1	L2	L3
10	20	18.10	14	20.50	15	5.50	4
11	22	20.60	16.50	23.50	18	5.50	4
12	22	20.60	16.50	23.50	18	5.50	4
13	25	23.10	19	28	22	6	4
14	25	23.10	19	28	22	6	4
15	29	26.90	21	29	22	7	5
16	29	26.90	21	30	23	7	5
17	29	26.90	21	30	23	7	5
18	33	30.90	25	32	24	8	5
19	33	30.90	25	33	25	8	5
20	33	30.90	25	33	25	8	5
21	38	35.40	30	33	25	8	5.50
22	38	35.40	30	33	25	8	5.50
23	38	35.40	30	35	27	8	5.50
24	38	35.40	30	35	27	8	5.50
25	40	38.20	33	35.50	27	8.50	5.50
28	46	43.30	38	38	29	9	5.50
29	46	43.30	38	39	30	9	5.50
30	46	43.30	38	39	30	9	5.50
32	46	43.30	38	39	30	9	5.50
33	48	53.50	45	50.50	39	11.50	7.50
35	50	53.50	45	50.50	39	11.50	7.50
38	58	60.50	52	50.50	39	11.50	7.50
40	58	60.50	52	50.50	39	11.50	7.50