



LÍMITES OPERATIVOS

Presión: 15 Bar


Velocidad: 20 m/s

Temperatura: -30 °C ~ 200 °C



TC M7N

- Semiequilibrado, sentido independiente.
- CS/CS, grafito/silicio

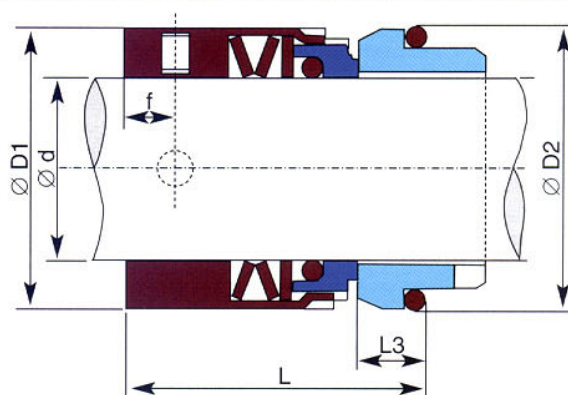

Diámetro d	D1	D2	L	L3	f
14	25	25	35	10	6
16	27	27	35	10	6
18	33	33	37.5	11.5	7
20	35	35	37.5	11.5	7
22	37	37	37.5	11.5	7
24	39	39	40	11.5	8
25	40	40	40	11.5	8
28	43	43	42	11.5	8
30	45	45	42.5	11.5	8
32	47	48	42.5	11.5	8
33	48	48	42.5	11.5	8
35	50	50	42.5	11.5	8
38	55	56	45	14	8
40	57	58	45	14	8
43	60	61	45	14	8
45	62	63	45	14	8

Diámetro d	D1	D2	L	L3	f
48	65	66	45	14	8
50	67	70	47.5	15	8
53	70	73	47.5	15	8
55	72	75	47.5	15	8
58	79	78	52.5	15	9
60	81	80	52.5	15	9
63	84	83	52.5	15	9
65	86	85	52.5	15	9
68	89	90	52.5	18	9
70	91	92	60	18	9
75	99	97	60	18	10
80	104	105	60	18.2	10
85	109	110	60	18.2	10
90	114	115	65	18.2	10
95	119	120	65	19.2	10
100	124	125	65	19.2	10