




LÍMITES OPERATIVOS

Presión: 10 Bar


Velocidad: 20 m/s

Temperatura: -40 °C ~ 200 °C

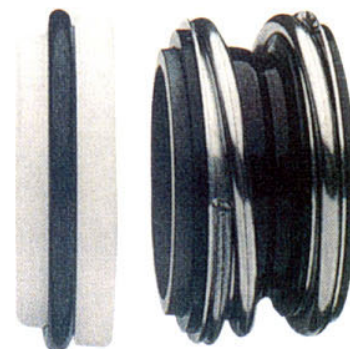

TC MG1

- No equilibrado, sentido independiente
- Grafito/cerámica, CS/CS.

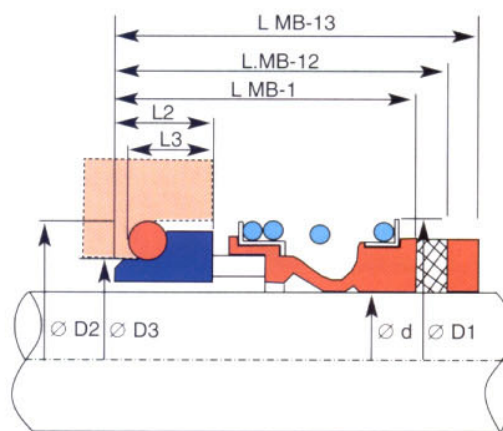

Diámetro d	D1	D2	D3	L MB-1	L MB-12	L MB-13	L2	L3
10	24	21	15.5	23.5	34.9	42.4	9	6.6
12	24	23	17.5	23	33.9	41.4	8	5.6
14	28	25	20.5	25	36.4	41.4	8	5.6
15	28	27	20.5	26	37.4	42.4	9	6.6
16	28	27	22	27	38.4	43.4	10	7.5
18	31	33	24	30	40.5	48	10.5	8
20	36	35	29.5	31.5	40	47.5	10	7.5
22	36	37	29.5	31.5	40	47.5	10	7.5
24	40.5	39	32	32.5	42.5	52.5	10	7.5
25	41	40	32	33	42.5	52.5	10	7.5
28	47	43	36	38	46.5	54	11.5	9
30	47	45	39.2	39.5	48	55.5	13	10.5
32	51	48	42.2	40.5	48	60.5	13	10.5
33	51	48	42.2	41	48.5	61	13.5	11
35	55	50	46.2	42	48.5	61	13.5	11
38	58	56	49.2	43	49	59	13	10.3
40	60	58	52.2	43.5	49.5	59.5	13.5	10.8

Diámetro d	D1	D2	D3	L MB-1	L MB-12	L MB-13	L2	L3
43	63	61	53.3	44.5	50.5	65.5	14.5	12
45	65	63	53.3	44.5	50.5	65.5	14.5	11.6
48	69	66	59.7	44.5	50.5	65.5	14.5	11.6
50	71	70	60.8	44.5	52.5	65	14.5	11.6
53	76	73	63.8	48	51.5	74	15	12.3
55	78	75	66.5	51	52.5	75	16	13.3
58	82	78	69.5	53	57.5	75	16	13.3
60	85	80	71.5	54	57.5	75	16	13.3
65	90	85	76.5	56	57.5	85	16	13
68	94	90	82.7	56	64.7	84.7	16	13.7
70	97	92	83	56	64.7	84.7	16	13
75	102	97	90.2	57	65	85.7	17	14
80	108	105	95.2	58	66	96	18	15
85	117	110	100.2	59	64	94	18	14.8
90	126	115	105.2	63	69	94	18	14.8
95	131	120	111.6	65	70	95	19	15.8
100	136	125	114.5	66	70	95	19	15.8