




LÍMITES OPERATIVOS

Presión: 10 Bar

Velocidad: 25 m/s

Temperatura: -40 °C ~ 200 °C

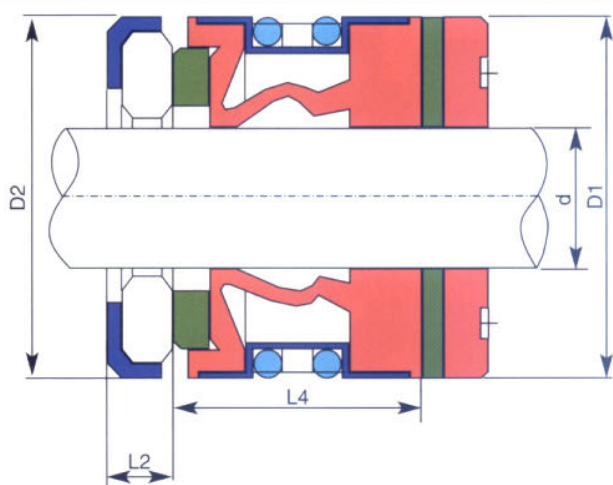

TC MG21

- No equilibrado, sentido independiente.
- Grafito/cerámica, CS/CS.

Diámetro d	D1	D2	L2	L4
10	20	21	5	15
12	22	23	6	15
14	24	25	6	15
15	25	26	6	15
16	26	27	6	15
18	32	33	6	20
20	34	35	6	20
22	36	37	6	20
24	38	39	6	20
25	39	40	6	20
28	42	43	6	26
30	44	45	7	26
32	46	48	7	26
33	47	48	7	26
35	49	50	8	26
38	54	56	8	30
40	56	58	8	30
43	59	61	8	30

Diámetro d	D1	D2	L2	L4
45	61	63	8	30
48	64	66	10	30
50	66	70	10	30
53	69	73	10	30
55	71	75	10	30
58	78	78	10	33
60	80	80	12	33
63	83	83	12	33
65	85	85	12	33
68	88	90	12	33
70	90	92	12	33
75	99	97	12	40
80	104	105	14	40
85	109	110	14	40
90	114	115	14	40
95	119	120	14	40
100	124	125	14	40