




LÍMITES OPERATIVOS

Presión: 10 Bar

Velocidad: 20 m/s


Temperatura: -40 °C ~ 200 °C

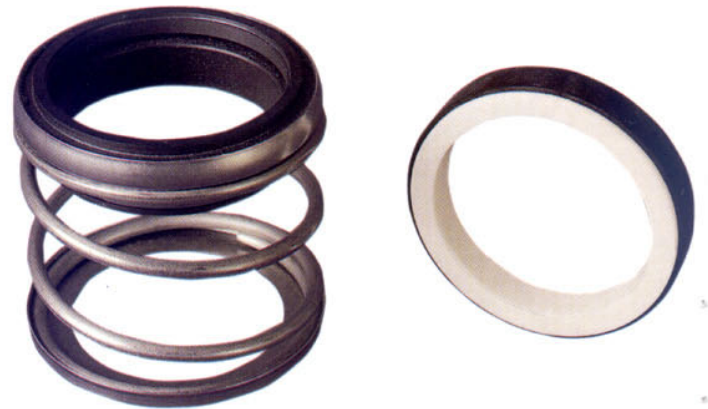

TC P.SEAL

Estacionaria Metrico.

- No equilibrado, sentido independiente.
- Grafito/cerámica, CS/CS.
- Muelle simple.
- Juntas EPT/Viton.

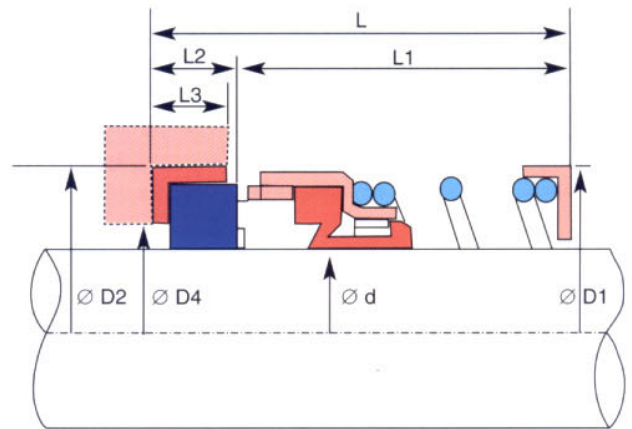

Ø mm.	Ø inch.	D1	D2	D4	L	L1	L2	L3
10	3/8"	22.95	24.60	16	34.14	25.40	8.74	7.47
12	1/2"	23.90	27.79	19.05	34.14	25.40	8.74	7.47
13	-	23.90	27.79	19.05	34.14	25.40	8.74	7.47
14	-	26.70	30.95	22.23	35.72	25.40	10.32	8.97
15	-	26.70	30.95	22.23	35.72	25.40	10.32	8.97
16	5/8"	26.70	30.95	22.23	35.72	25.40	10.32	8.97
18	-	31.10	34.15	25.40	35.72	25.40	10.32	8.97
19	3/4"	31.10	34.15	25.40	35.72	25.40	10.32	8.97
20	-	33.40	35.70	26.99	35.72	25.40	10.32	8.97
22	7/8"	33.40	37.30	28.58	35.72	25.40	10.32	8.97
24	-	39.20	40.50	31.75	35.72	25.40	10.32	8.97
25	1"	43.20	40.50	31.75	35.72	25.40	10.32	8.97
28	1" 1/8	46.30	47.63	35.72	45.33	33.34	11.99	10.46
30	-	49.40	50.80	38.89	45.33	33.34	11.99	10.46
32	1" 1/4	49.40	50.80	38.89	45.33	33.34	11.99	10.46
33	-	52.60	53.98	42.07	45.33	33.34	11.99	10.46
34	-	52.60	53.98	42.07	45.33	33.34	11.99	10.46
35	1" 3/8	52.60	53.98	42.07	45.33	33.34	11.99	10.46
38	1" 1/2	55.80	57.15	45.24	45.33	33.34	11.99	10.46
40	1" 5/8	59.20	60.35	48.82	45.33	33.34	11.99	10.46

Ø mm.	Ø inch.	D1	D2	D4	L	L1	L2	L3
42	-	66	63.50	51.59	52.47	40.48	11.99	10.46
43	-	66	63.50	51.59	52.47	40.48	11.99	10.46
44	-	66	63.50	51.59	52.47	40.48	11.99	10.46
45	1" 3/4	66	63.50	51.59	52.47	40.48	11.99	10.46
48	1" 7/8	66.60	66.70	54.75	52.47	40.48	11.99	10.46
50	2"	71.65	69.85	58	52.47	40.48	11.99	11.96
53	2" 1/8	73.30	73.05	62	54.50	41	13.50	11.96
55	-	78.40	76.20	65	54.50	41	13.50	11.96
58	-	82	79.40	68	54.50	41	13.50	11.96
60	2" 3/8	82	79.40	68	54.50	41	13.50	11.96
63	2" 1/2	84.90	82.55	71.20	54.50	41	13.50	11.96
65	-	88.40	92.10	78.35	64.90	49	15.90	14.50
70	2" 3/4	92.60	95.25	81.10	64.90	49	15.90	14.50
73	2" 7/8	94.85	98.45	84.50	64.90	49	15.90	14.50
75	3"	102.70	101.65	88.10	64.90	49	15.90	14.50
80	-	104	114.30	97	76	56	20	18.50
85	-	108	117.50	100	76	56	20	18.50
90	-	112	123.85	107	79	59	20	18.50
95	-	119	127	110	79	59	20	18.50
100	-	124	133.35	116	82	62	20	18.50



LÍMITES OPERATIVOS

Presión: 10 Bar


Velocidad: 20 m/s

Temperatura: -40 °C ~ 200 °C

TC P.SEAL

Estacionaria DIN "L" Cad.

- No equilibrado, sentido independiente.
- Grafito/cerámica, CS/CS.
- Muelle simple.
- Juntas EPT/Viton.

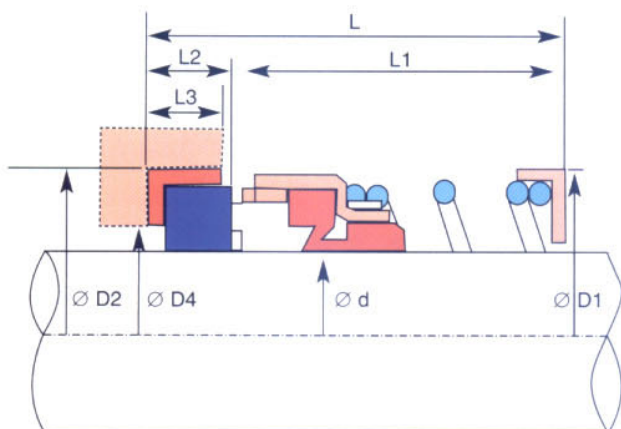

Diámetro d	D1	D2	D4	L	L1	L2	L3
12	21.70	23	19	32.50	23.90	8.60	5.50
14	23.90	25	21	35	26.40	8.60	5.50
16	26.70	27	23	35	26.40	8.60	5.50
18	30.40	33	27	37.50	27.50	10	7
20	33.40	35	29	37.50	27.50	10	7
22	33.40	37	31	37.50	27.50	10	7
24	38	39	33	40	30	10	7
25	39.30	40	34	40	30	10	7
28	42	43	37	42.50	32.50	10	7
30	43.95	45	39	42.50	32.50	10	7
32	45.80	48	42	42.50	32.50	10	7
33	45.80	48	42	42.50	32.50	10	7
35	49	50	44	42.50	32.50	10	7
38	52.80	56	49	45	34	11	8
40	55.80	58	51	45	34	11	8
43	58.80	61	54	45	34	11	8
45	61	63	56	45	34	11	8

Diámetro d	D1	D2	D4	L	L1	L2	L3
48	64	66	59	45	34	11	8
50	66	70	62	47.50	34.50	13	8.50
53	70.65	73	65	47.50	34.50	13	8.50
55	71.65	75	67	47.50	34.50	13	8.50
58	78.40	78	70	52.50	39.50	13	8.50
60	78.40	80	72	52.50	39.50	13	8.50
63	81.50	83	75	52.50	39.50	13	8.50
65	84.30	85	77	52.50	39.50	13	8.50
68	89.65	90	81	52.50	37.20	15.30	9.50
70	89.65	92	83	52.50	37.20	15.30	9.50
75	96.80	97	88	60	44.70	15.30	9.50
80	104	105	95	60	44.30	15.70	10
85	107.95	110	100	60	44.30	15.70	10
90	111.10	115	105	65	49.30	15.70	10
95	119	120	110	65	49.30	15.70	10
100	124	125	115	65	49.30	15.70	10