



LÍMITES OPERATIVOS

Presión: 10 Bar


Velocidad: 20 m/s

Temperatura: -30 °C ~ 200 °C



TC RN - DIN

- No equilibrado, sentido dependiente.
- Estellite/grafito, CS/CS. W/W.
- Muelle simple.
- Disponible EPT/Viton.

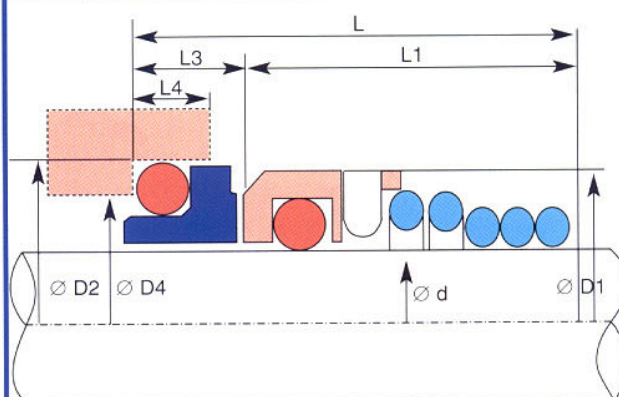

Diámetro d	D1	D2	D4	L	L1	L3	L4
10	19	21	17	22	15	7	4
12	21	23	19	25	18	7	4
14	23	25	21	29	22	7	4
16	26	27	23	30	23	7	4
18	29	33	27	34	24	10	5
20	31	35	29	35	25	10	5
22	33	37	31	35	25	10	5
24	35	39	33	37	27	10	5
25	36	40	34	37	27	10	5
28	40	43	37	39	29	10	5
30	43	45	39	40	30	10	5
32	46	48	42	40	30	10	5
33	46	48	42	49	39	10	5
35	49	50	44	49	39	10	5
38	53	56	49	55	42	13	6
40	56	58	51	55	42	13	6
43	59	61	54	60	47	13	6

Diámetro d	D1	D2	D4	L	L1	L3	L4
45	61	63	56	60	47	13	6
48	64	66	59	60	47	13	6
50	66	70	62	60	46	14	6
53	69	73	65	70	56	14	6
55	71	75	67	70	56	14	6
58	76	78	70	70	56	14	6
60	78	80	72	70	56	14	6
63	81	83	75	70	56	14	6
65	84	85	77	80	66	14	6
68	88	90	81	80	64	16	7
70	89	92	83	80	64	16	7
75	98	97	88	80	64	16	7
80	100	105	95	90	72	18	7
85	107.50	110	100	90	72	18	7
90	111	115	105	90	72	18	7
95	119	120	110	90	72	18	7
100	123.80	125	115	90	72	18	7