




LÍMITES OPERATIVOS

Presión: 10 Bar

Velocidad: 20 m/s

Temperatura: -30 °C ~ 200 °C

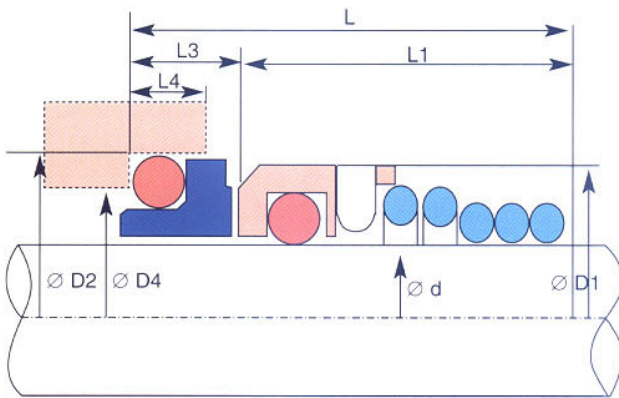

TC RN

- No equilibrado, sentido dependiente.
- Estellite/grafito, CS/CS. W/W.
- Muelle simple.
- Disponible EPT/Viton.

Diámetro d	D1	D2	D4	L	L1	L3	L4
10	19	18.10	14	20.50	15	5.50	4
11	21	20.60	16.50	23.50	16	5.50	4
12	21	20.60	16.50	23.50	18	5.50	4
13	23	23.10	19	28	22	6	4
14	23	23.10	19	28	22	6	4
15	24	26.90	21	29	22	7	5
16	26	26.90	21	30	23	7	5
17	26	26.90	21	30	23	7	5
18	29	30.90	25	32	24	8	5
19	31	30.90	25	33	25	8	5
20	31	30.90	25	33	25	8	5
21	33	35.40	30	33	25	8	5.50
22	33	35.40	30	33	25	8	5.50
23	35	35.40	30	35	27	8	5.50
24	35	35.40	30	35	27	8	5.50
25	36	38.20	33	35.50	27	8.50	5.50
26	36	38.20	33	35.50	27	8.50	5.50
27	36	38.20	33	35.50	27	8.50	5.50
28	40	43.30	38	38	29	9	5.50
29	43	43.30	38	39	30	9	5.50
30	43	43.30	38	39	30	9	5.50
31	46	43.30	38	39	30	9	5.50
32	46	43.30	38	39	30	9	5.50
33	46	53.50	45	50.50	39	11.50	7.50
34	49	53.50	45	50.50	39	11.50	7.50
35	49	53.50	45	50.50	39	11.50	7.50

Diámetro d	D1	D2	D4	L	L1	L3	L4
36	49	53.50	45	50.50	39	11.50	7.50
37	49	53.50	45	50.50	39	11.50	7.50
38	53	60.50	52	50.50	39	11.50	7.50
39	56	60.50	52	50.50	39	11.50	7.50
40	56	60.50	52	50.50	39	11.50	7.50
41	56	60.50	52	50.50	39	11.50	7.50
42	59	60.50	52	50.50	39	11.50	7.50
43	59	60.50	52	50.50	39	11.50	7.50
44	61	65.50	57	52.50	41	11.50	7.50
45	61	65.50	57	52.50	41	11.50	7.50
46	61	65.50	57	52.50	41	11.50	7.50
47	64	65.50	57	52.50	41	11.50	7.50
48	64	65.50	57	52.50	41	11.50	7.50
49	64	65.50	57	52.50	41	11.50	7.50
50	66	72.50	64	56.50	45	11.50	7.50
55	71	72.50	64	58.50	47	11.50	7.50
60	78	79.30	72	60.50	49	11.50	7.50
65	84	84.50	77	62.50	51	11.50	7.50
70	89.60	89.50	82	62.50	51	11.50	7.50
75	98	94.50	87	68.50	57	11.50	7.50
80	100	99.50	92	70.50	59	11.50	7.50
85	107.50	105.50	98	72.50	59	13.50	8
90	111	111.50	105	75.50	62	13.50	8
95	119	116.50	110	75.50	62	13.50	8
100	123.80	119.50	114	88.50	75	13.50	8